


City Unified School District

**Business Services
Contracts Office**

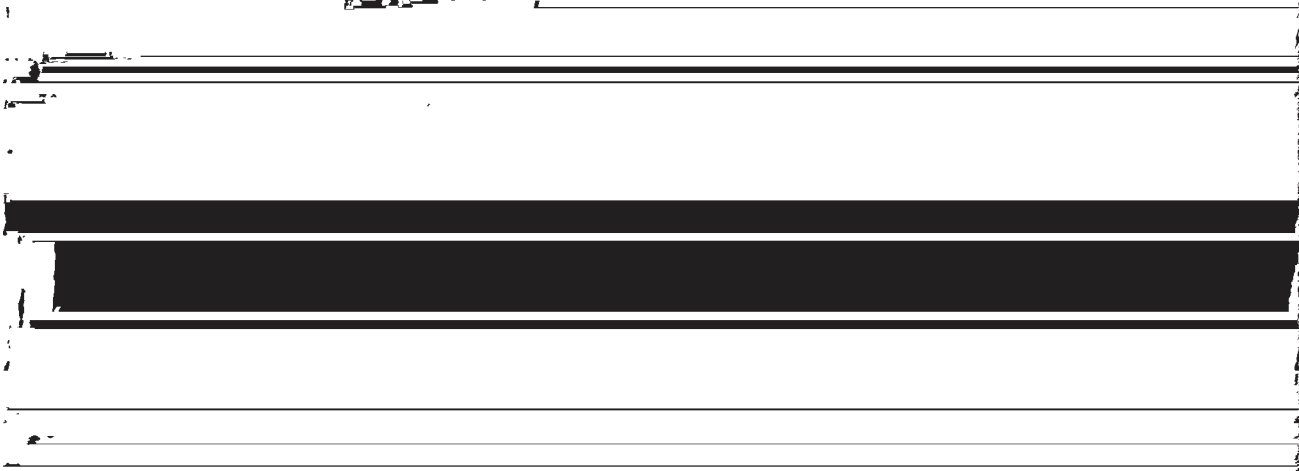

(916) 643-2464


*Gerardo Castillo, Chief Business Officer
Kimberly Teague, Contract Specialist*

ADDENDUM NO. 1

Date: February 17, 2017

Approved by Sacramento City Unified School District

10GBASE-LRM SFP Module
10 LC to LC 9/125 Singlemode Duplex Yellow 3 Meter Fiber Cable

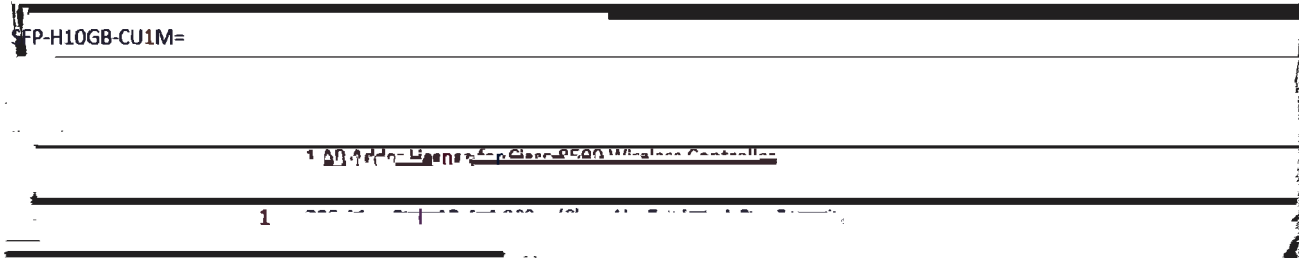

City Unified School District

2 [REDACTED] Bid will be awarded in its entirety to one firm. Partial bids will not be accepted or awarded.

[REDACTED]

1.2.1.20 Description of Work for each of the 23 sites:

1.2.1.20.1 See Appendix for more specific site information

1.2.1.20.2 Maximum Workstation cabling, if discrepancy from site information, the more stringent applies.

1.2.1.22.2.1 Install three (3) Category 6 cables to each staff and / or teacher workstation. Location as determined in the field by the Owner.

1.2.1.22.2.2 Install six (6) Category 6 cables in each classroom. One classroom per site will be considered a computer lab and will require 42 drops. Location as determined in the field by the Owner.

1.2.1.22.2.3 Install one (1) Category 6 cables to each phone location. Locations as determined in the field by the Owner.

1.2.1.22.2.4 Homerun all Cat6 station cables to the Network Room and / or location directed by Owner.

1.2.1.22.2.5 Terminate all station cables in the Network Room

1.2.1.22.3.1.5 No exposed conduit, on the interior of
the building, unless approved by the


Owner, prior to installation.

1.2.1.22.3.1.6 It is the responsibility of the

drilling through floor/ceiling/walls for
cabling penetrations. Contractor will
be liable for any damage caused to
components in floor/ceiling/walls.

Architect's scope of work does not include existing
map for reference

END OF SECTION

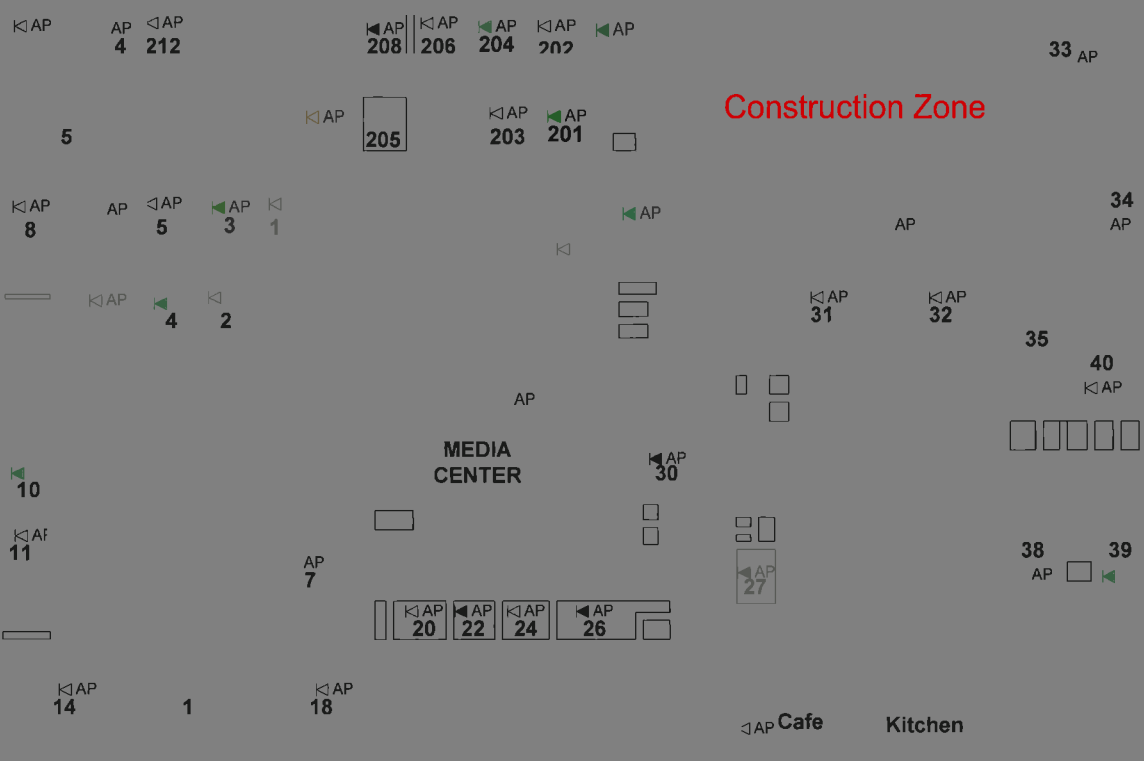

LEGEND

- DATA
- AP WITH DEVICE
- AP DATA DROP
- IDF Replaced
- IDF Existing
- MDF

